

NASclean®


Gasket Filter (Tube Type)

NASclean® Gasket Filters are housingless filters which can be directly installed as a gasket in metal gasket seal fitting applications. Therefore, additional installation space is unnecessary, installation in existing plumbing is possible and filters can be easily exchanged.

Particle retention values as of 0.0025 micron and above are available and the filters can be used in a wide variety of applications including filtration of the process gases, equipment protection and protecting the cleanliness of the downstream gas lines.



Example of Installation

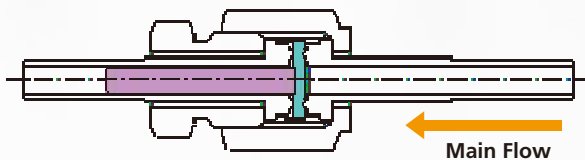

Features


- Can be installed into existing plumbing
- Superior Flow Characteristics
- Particle retention values of 0.0025 micron and above
- Flow in both directions possible.
- Cost-effective

NASclean is trademark of Nippon Seisen. © Indicate a Nippon Seisen trademark registered in the USA.

Standard Specification

Model	Particle Retention (μm)	Maximum Differential Pressure (MPa)		Maximum Operating Temperature (°C)	Fitting Size	Material	
		IN→OUT	OUT→IN			Media	Gasket
GF-T001	0.0025	4.0	5.0	400	1/4"	316L Stainless Steel	Nickel
GF-T03A-W	0.3	4.0	5.0	460	1/4"	316L Stainless Steel	
GF-T03A(ST)-W	0.3	4.0	5.0	460	1/4"	316L Stainless Steel	
GF-T03L-WH	0.3	3.4	5.0	460	3/8", 1/2"	316L Stainless Steel	


Dimensions

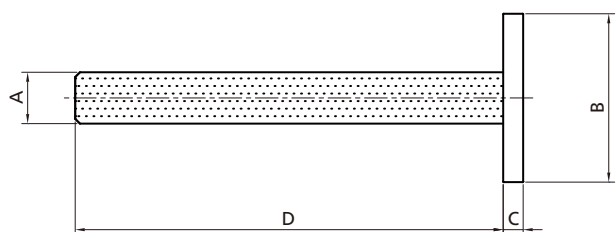


Model	Unit:mm			
	A	B	C	D
GF-T001	(φ4)	(φ11.8)	(1.6)	(27)
GF-T03A-W	(φ3.6)	φ11.8	1.4	(30)
GF-T03A(ST)-W				(20)
GF-T03L-WH	(φ7)	φ19.3	1.4	(30)

Flow performance


GF-T001

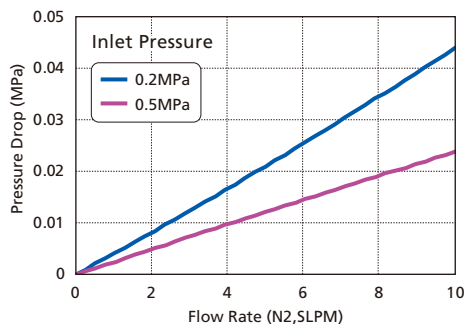


GF-T03A-W

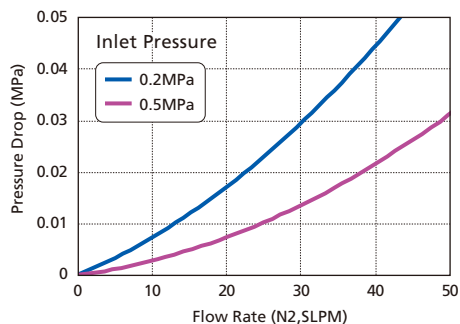

GF-T03A(ST)-W

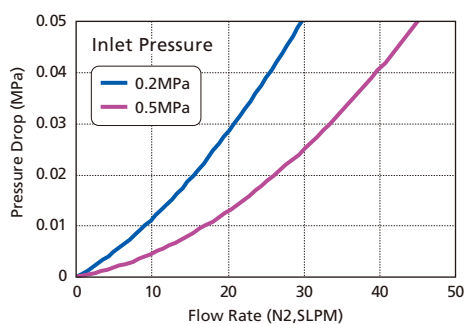

GF-T03L-WH

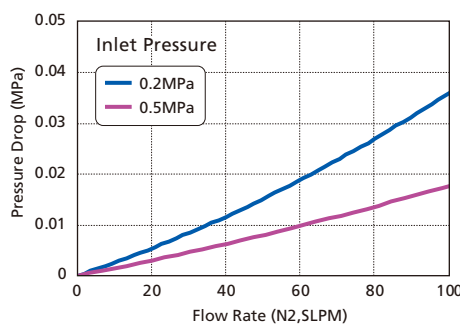

- ※A characteristic varies according to shape of sleeve.
- ※The flow performance in case of 316L stainless steel gasket material is equal to the case of standard Ni gaskets.
- ※The data listed in this catalogue are representative figures measured under specific conditions. Please confirm whether the specifications of the product apply to desired operating conditions.
- ※Nippon Seisen makes no guarantee regarding the applicability of its filters or fitness for particular applications. The specifications of the product are subject to change without notice.
- ※Please contact Nippon Seisen with any questions.